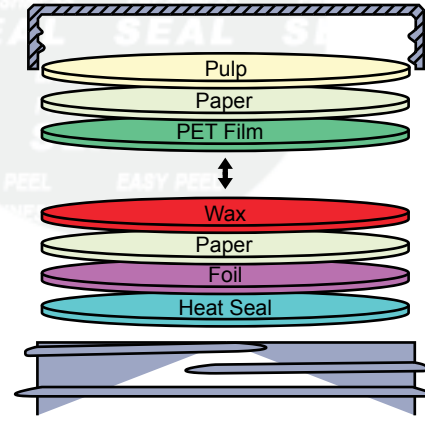


# Safe-Gard *plus*™ Technical Data Sheet

## 0.83mm Safe-Gard plus-208/N

Revision: SGPLUS208N-11302017

<b>Product</b>	0.83mm Safe-Gard plus™ 208/N																										
<b>Scope</b>	Two piece board backed heat induction foil inner seal, that will provide a tamper indicating seal to glass and PE. Typically used for dry products, however for glass with specific specialised treatment, can be used for wet products.																										
<b>Composition</b>	<table border="1"> <thead> <tr> <th>Material</th> <th>Standard</th> <th>Metric</th> </tr> </thead> <tbody> <tr> <td>Pulp</td> <td>0.024"</td> <td>0.6mm</td> </tr> <tr> <td>Paper</td> <td>60gsm (weight)</td> <td>60gsm (weight)</td> </tr> <tr> <td>PET Film</td> <td>0.0005"</td> <td>0.012mm</td> </tr> <tr> <td>Wax</td> <td>16gsm (weight)</td> <td>16gsm (weight)</td> </tr> <tr> <td>Paper</td> <td>80gsm (weight)</td> <td>80gsm (weight)</td> </tr> <tr> <td>Foil</td> <td>0.001"</td> <td>0.025mm</td> </tr> <tr> <td>Heat Seal</td> <td>23gsm (weight)</td> <td>23gsm (weight)</td> </tr> </tbody> </table>	Material	Standard	Metric	Pulp	0.024"	0.6mm	Paper	60gsm (weight)	60gsm (weight)	PET Film	0.0005"	0.012mm	Wax	16gsm (weight)	16gsm (weight)	Paper	80gsm (weight)	80gsm (weight)	Foil	0.001"	0.025mm	Heat Seal	23gsm (weight)	23gsm (weight)	 <p>Adhesive or resin bonding layers not shown.</p>	
Material	Standard	Metric																									
Pulp	0.024"	0.6mm																									
Paper	60gsm (weight)	60gsm (weight)																									
PET Film	0.0005"	0.012mm																									
Wax	16gsm (weight)	16gsm (weight)																									
Paper	80gsm (weight)	80gsm (weight)																									
Foil	0.001"	0.025mm																									
Heat Seal	23gsm (weight)	23gsm (weight)																									
<b>FDA Status:</b> Further details available on request	<b>Recommended Storage and Handling:</b> Refer to website																										
<b>Drug Master File (DMF):</b>	<b>EU / EP Reg.:</b> 1935/2004/EC, 10/2011/EC, 2023/2006/EC																										
<b>GTR Oxygen:</b> Essentially Zero	<b>MVTR:</b> Essentially Zero																										
<b>Sealing to glass containers:</b> Selig can not guarantee the performance or seal integrity of these materials when applied to any glass (treated or untreated) container. We suggest you contact your glass supplier for recommendations on glass treatments that may or may not improve performance or seal integrity.																											
<b>Print Location (if any):</b> Print can be on upper paper surface on foil membrane.																											

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

The information contained within this product data bulletin is to be used as a general guide in determining which structures are offered for sealing to specific container materials. All of the information which we provide is reliable to the best of our knowledge, but the accuracy thereof is not guaranteed. We suggest that consumers determine suitability for their own application.